

WATER MONITORING SOLUTIONS



WASTEWATER

INDUSTRY

SURFACE WATER

DVP

Doppler Velocity
Probe

- Bidirectional measurement
 $0,01 \text{ m.s}^{-1}$ to 5 m.s^{-1}
- Velocity measurement possible
in very shallow water
- RS485 ModBus or SDI-12
connection
- Low power consumption
- Velocity measurement:
Temperature and speed of sound
correction

 **Modbus RTU**
SDI-12


ATEX


IECEX

HYDREKA
www.hydreka.com
A HALMA COMPANY

Presentation

The DVP sensor measures and records water velocity for open channels and part-filled pipes.

The DVP is used:

- In temporary metrology, through study and diagnosis for a better understanding of your wastewater networks,
- In permanent metrology, as part of the regulation of wastewater networks, storm overflows and wastewater treatment plants.

The DVP is used for the following applications:

- Wastewater networks monitoring, irrigation canals, rivers and streams,
- Survey and diagnosis,
- Flood prevention,
- Industrial discharge agreements,
- Onsite flowmeter control.

Measuring principle




Signal quality recovery :

For each measurement, the signal quality is calculated based on several criteria (flow balance, signal level...). This tool lets you know the measurement integrity for reliable your measurements.

Using a Doppler-effect technology:

An ultrasonic beam is emitted, along the pipe interior, by an immersed probe. The ultrasonic signals are reflected by the suspended particles in the water. The reflected signals are then analyzed to determine the mean water velocity.

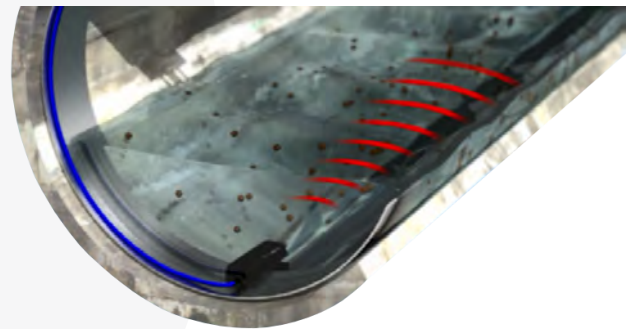

Profile generator

The DVP sensor has its own height / surface conversion tables. The flow is then automatically calculated by the DVP after transmission of a water height data via a ModBus or SDI-12 digital interface.

Whether for regular profiles (circular, rectangular, ovoidal ...) or random profile, the generator makes it possible to create the majority of the profiles encountered in the field.

Profile generator

1.5 m

Deposit

900 mm

New
Load
Save
Attach
Edit


Circle
Egg 1
Egg 2
Width
Depth
Square
Rectangle
Trapezium
Triangle

Generale
Deposit

Help
Quit


A:
P:

Width: 900 mm
Depth: 1500 mm

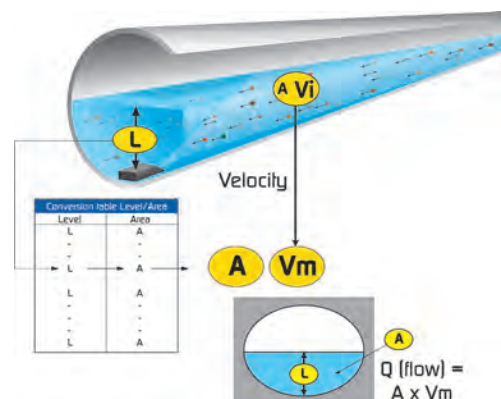

Connections

Digital logger



OPERAX
P400Xi
compatible



SCADA systems

DVP

Portable MainFLO®



Stationary MainFLO®



Samplers

Benefits



Measurement accuracy



Low velocity—Shallow water



Signal quality



Height/Surface tables included



Waterproof



Digital sensor




Connection to SCADA System



Temperature



Installation in explosive atmosphere



Digital filters

Technical specifications

	<i>Measuring principle</i>	DSP Doppler using twin 1 MHz transducers
	<i>Range</i>	Bi-directional 0.01 to 5 m/s (0.03 to 16.4 ft/s)
Velocity	<i>Accuracy</i>	± 2 % of reading if V ≥ 0.5m/s (1.64 ft/s) ± 0.01 m/s (± 0.03 ft/s) if V < 0.5m/s (1.64 ft/s)
	<i>Resolution</i>	1 mm/s (0.003ft/s)
	<i>Minimum fluid level</i>	15 mm (0.59 in) to 20mm (0.79in) above base of sensor, provided transducers fully wetted
	<i>Range</i>	-10 °C to +85 °C (14°F to 185°F)
Temperature	<i>Accuracy</i>	± 0.5 °C (± 0.9°F)
	<i>Resolution</i>	0.5 °C (0.9°F)
	Speed of Sound Correction	Fixed (user set) or Variable (using temperature and user input Conductivity @ 25 °C(77°F) value)
Units		m/s or ft/s
Digital Connection	<i>Hardware</i>	RS232 / RS485 / SDI-12
	<i>Protocols</i>	Modbus RTU / SDI-12 / # Commands
Connectors		- Free leads - Amphenol connector (metallic) - Souriau connector (plastic)
Operating mode		Single measurement or continuous measurement
Data		Velocity, Temperature, Signal quality & Diagnostics
Power supply	<i>External</i>	9-28 VDC
	<i>Consumption</i>	14 mA at 12 VDC on standby, 25 mA at 12 VDC for measurement
Cable length		- 10 or 20m (32,8 or 65,6 ft)
		- Maximum cable length (with ATEX certification) : 100m (328ft)
		- Maximum cable length (without ATEX certification) : 300m (984ft)
Mounting		Sensor has 3 mounting points (M3) on the underside on stainless steel support
Operating temperature		-20 to +60 °C (fluid non-freezing)
Storage temperature		-20 to +70 °C
Materials		PVDF, polyurethane, 316 Stainless steel
Dimensions		19 mm (0.75 in) high * 46 mm (1.81 in) wide * 122 mm (4.80 in) long
Weight		1,1 kg for 10 meters (32,8 ft) cable
Immersion		IP68 / NEMA6
Certifications		II 2G Ex ib IIC T4 Gb Ta = -20°C to +60°C (-4°F to 140°F)
	<i>Provision</i>	
	<i>Certificate Numbers</i>	Sira 13ATEX2380X IECEX SIR 14.0051X
	<i>Standards</i>	IEC 60079-0:2011 IEC 60079-11:2011 IEC 80079-34:2011 ISO 9001:2008 BS 8888:2011
Warranty		24 months (up to 36 months with an extended warranty)



Products available for sales and rental.
Please contact us for more information.

HYDREKA
www.hydreka.com
A HALMA COMPANY

1, rue des Vergers - Bât 2A
69760 Limonest - France

Tél. +33 (0)4 72 53 11 53
Fax +33 (0)4 78 83 44 37
E-mail : hydreka@hydreka.fr